

## DECKON PREMIUM METAL CEILINGS HOOK-ON SYSTEM DATASHEET


### Technical Info:

Product	: aluminium or galvanised steel
Sizes	: 600x600mm, 300x600mm, 600x1200mm std
Thickness	: 0.50 - 0.70 mm
Surface	: electrostatic powder coated
Perforation	: none or $\varnothing$ 1.8-2.5mm hole diameter with 10-50-100mm bordure
Suspension sys	: hot dip galvanised steel, black
Edge detail	: 20-30mm up-turns, as specified
Fire Resistance	: class A as steel
Color	: RAL 9016, standard white


### Specification:


Hook-on system, also called as "concealed" is formed by allowing ceiling tiles lean on hook-on profiles (Z and L shape). All tiles are demountable manually without any special tool so that the system enables fast and easy access to the ceiling void.

### VISUAL

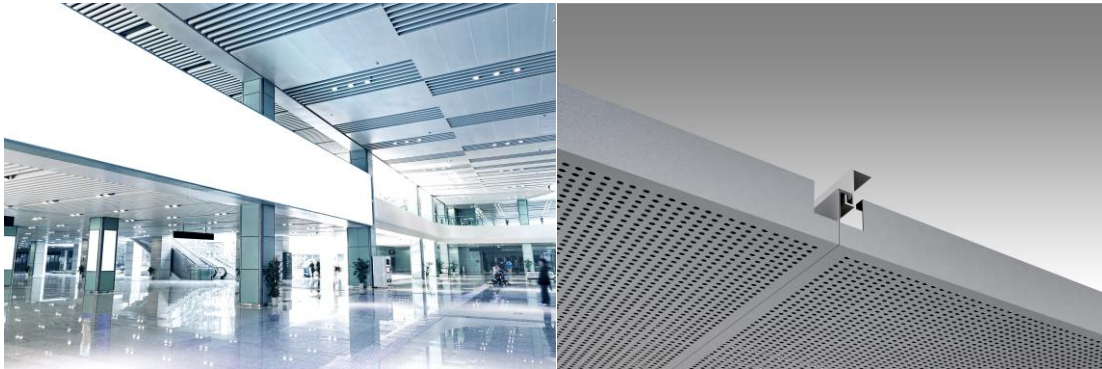


# TECHNICAL DRAWINGS

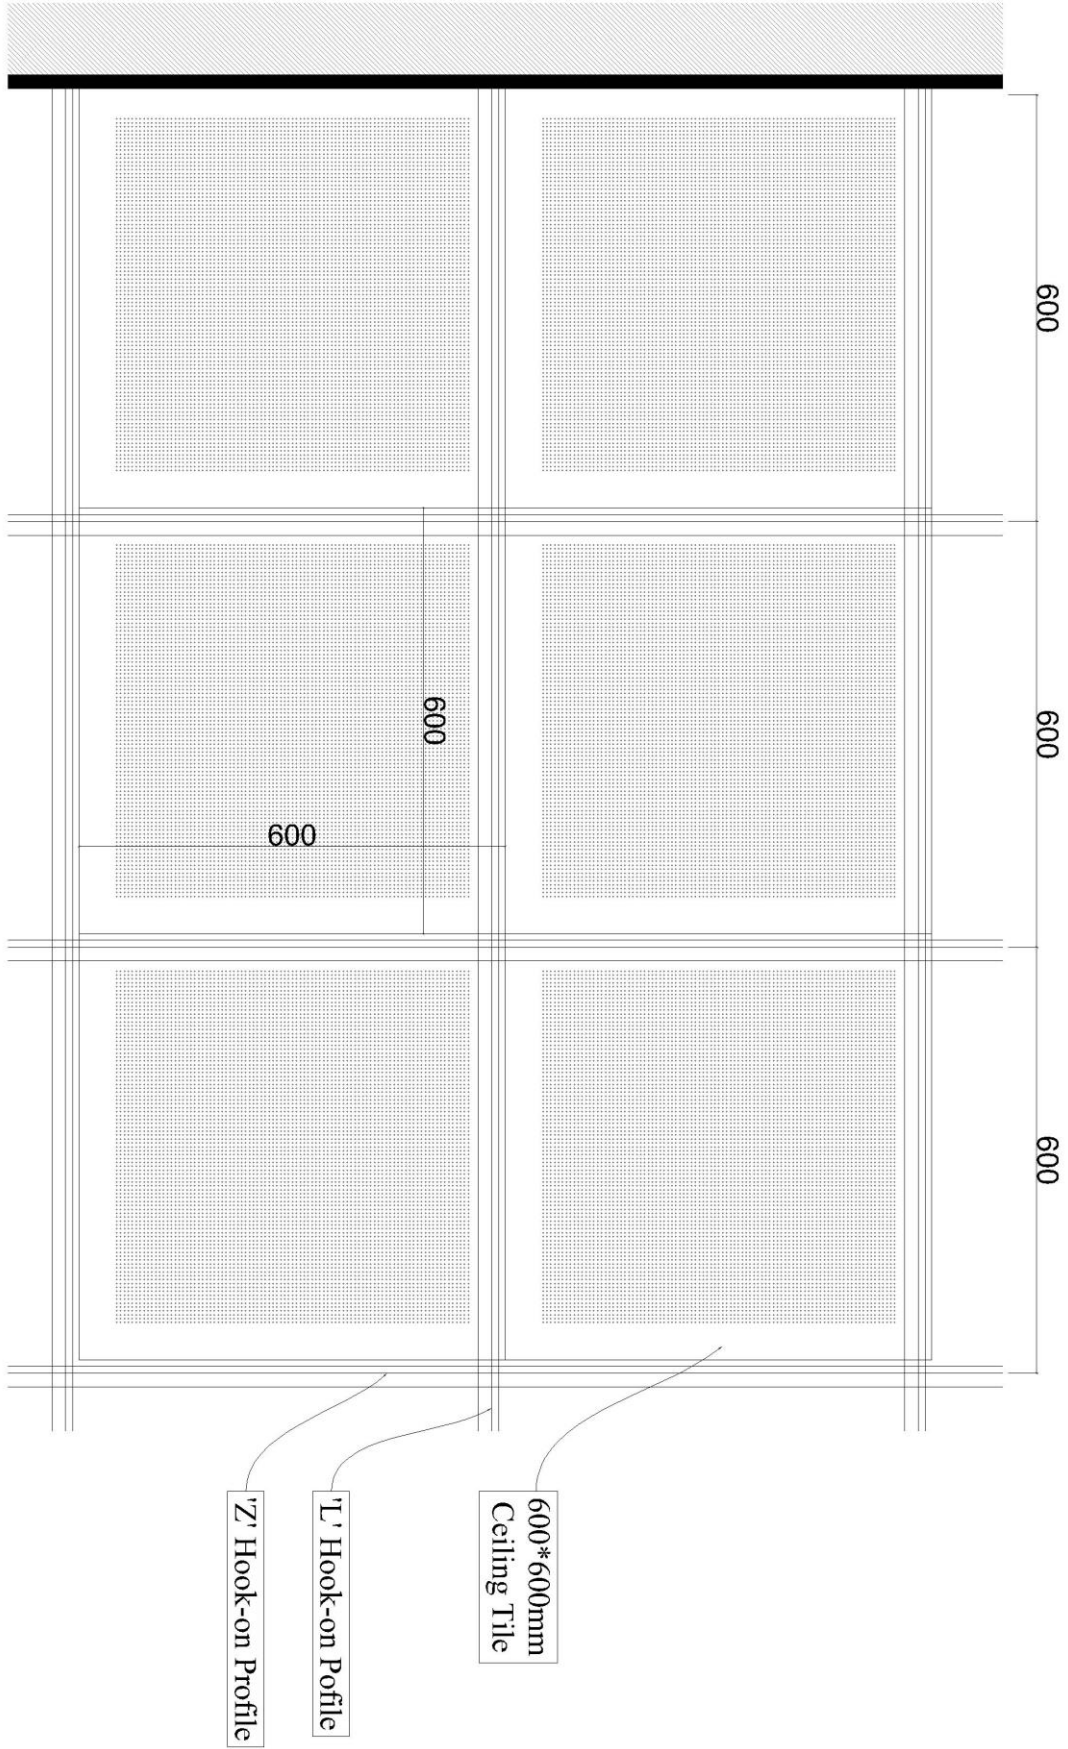


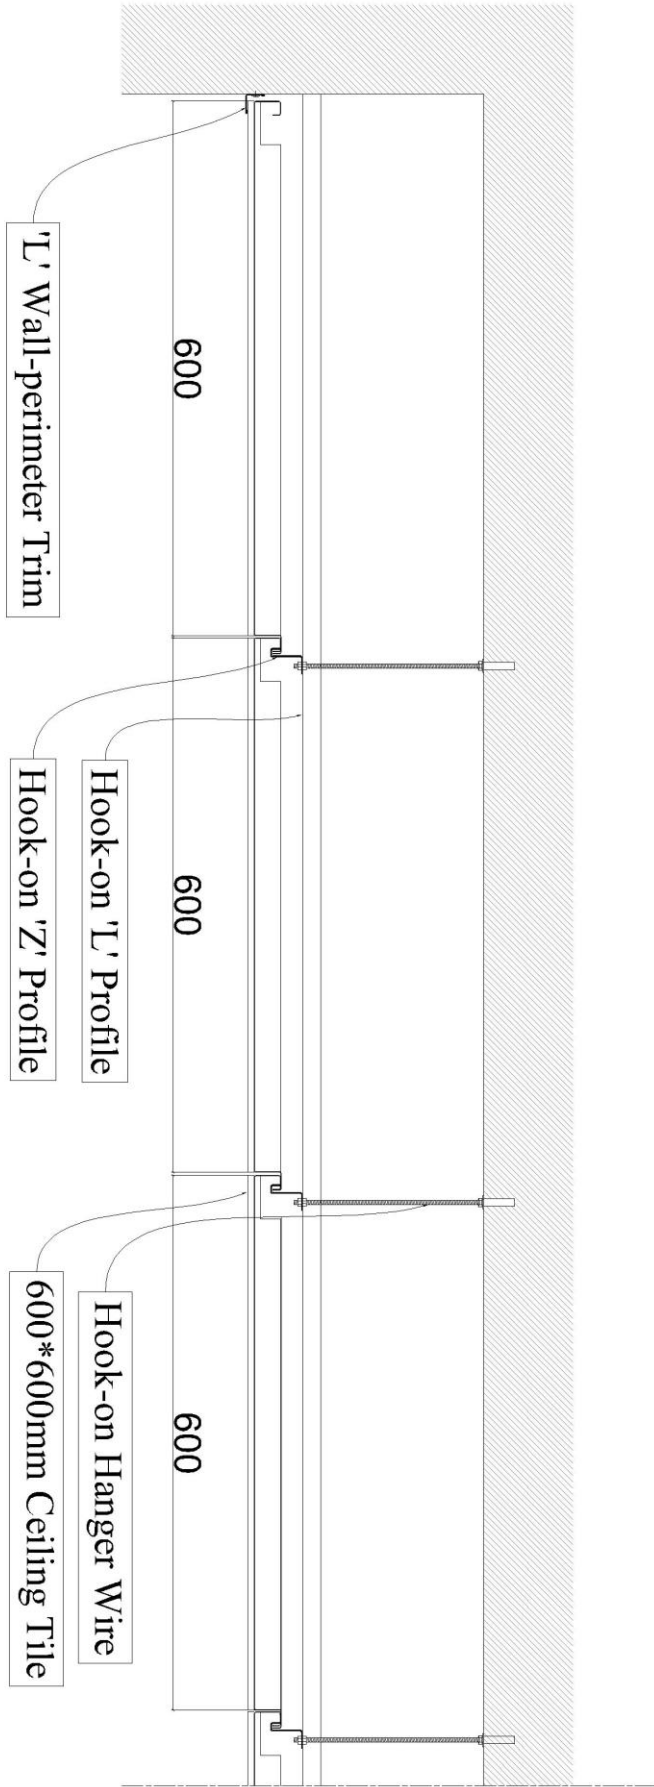

**SECTION**

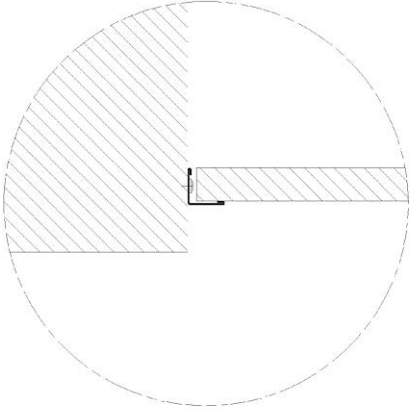


'L' Wall-perimeter Trim

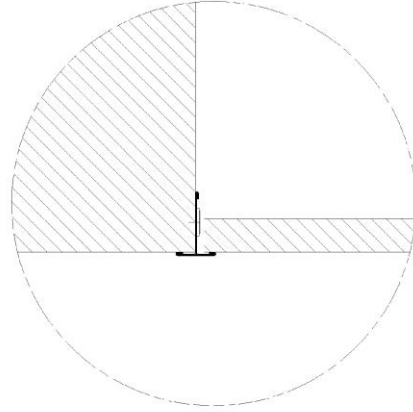

'T' Wall-perimeter Trim


## PERFORATIONS

full 2.5 mm perf.



Hole Diameter :  $\varnothing$  2.5 mm.  
Axis (center to center) : 5.5 mm. , 90°  
Perforation : Regular

full diagonal 1.8 mm perf.



Hole Diameter :  $\varnothing$  1.8 mm.  
Axis (center to center) : 5 mm. , 45°  
Perforation : Diagonal

